

For display-systems in mobile and special technology applications

- Input voltage range up to > 1:10
- Open build-up / chassis mounting
- Heat sink customized adaptable
- Over voltage protection
- Dyn. and stat. power limited
- EN 50155 / EN 50121 / EN 55011.B
- Hold-up time >10 ms (EN 50155, S2)  
external extendable (option) from  $U_{inmin}$
- EN 61000-4-4/5 disturbances level 3  
and 1,8kV / 42Ω



© registered trade mark of company SYKO GmbH & Co. KG

## Series **DNR-B**

### Display-supply with intelligent functions

#### General:

##### Outputs Uout1 / Uout2 / Uout3:

- Tolerance Uout1/3:  $\pm 1,5\%$  / Uout2:  $\pm 3\%$
- Regulation factor  $\Sigma(U_{in}+I_{out}+T_U) < \pm 1,5\%$
- Ripple  $< 20mV_{pp}$  (const. over  $T_U$ )
- Spikes  $< 100 mV_{pp}$  (T 1:1/50MHz)
- Current limiting approx.  $1,1 I_{outmax}$
- No-load-, over-load-, short circuit proof
- No basic load necessary
- Signals
 

BST	Confirmation
Inhibit	Uout1 ON / OFF
SBout	Switch position
PFout	Power-Fail
- Output Uout1 (5,1V) switchable  
(Aux. voltage Uout3 is active at any time)
- When Uout1 is switched off, Uout2 can be  
used with sum-consumption power for  
a heater-operation
- Connector: Wieland 12pol. 8213BL/12GOB

##### Input:

- Stationary current  $< 4 mA$  (SB open,  $U_{in}$  150 V)
- No-load power approx. 1 W (aktiv)
- Special release logic for the use in railway  
systems (application)
- Reverse pol. protection  
(length diode) / surgefest
- Input filter in accordance to EN 55011.B
- Active transient filter (Patent)
- Under voltage-switch off with  
amplitude- and time-hysteresis
- Power-fail-signal and hold-up time with  
energy activation at  $U_{inmin} < 14,4V$
- Input-interupt-bridging  $> 10 ms$   
in acc. to EN 50155 option S2 from  $U_{inmin}$   
Option: External extendable
- Connector: Amphenol 4pol. ECTA1331 EV295MS  
Option: Phoenix-Plug MSTBV2,5/4-GF-5,08

#### General:

- Isolation test voltage 1,5 KV<sub>AC</sub> 1 Min,
- Ambient temperature in acc. to LES-DB  
-25/+70°C (-40/+85°C short term)  
Derating 2%/°C  $> 70^\circ C$  with convection
- Derating 1,2%/°C  $> 60^\circ C$  without convection
- Heat conduction by mounting the power  
semiconductors on the customers heat-  
sink with pads
- Flange temperature max. 95°C at \*Point
- MTBF On request
- Shock/vibration in acc. to EN 50155
- Weight approx. 380g
- Dimensions: 160x100x35 mm<sup>3</sup> (without heat sink)  
with heat sink: 168x120x(34+11,5) mm<sup>3</sup>
- Heat sink optionally adaptable
- Application report on request

Stand: 02/07

<u>U<sub>in</sub></u> V	<u>U<sub>out1:2</sub></u> V	<u>I<sub>out1:2</sub></u> A	dyn-dyn A	Model- number
<b>14,4 - 154</b>	5,1·12	6,0·1,5	8,0·5,0	DNR-B 03-05-12-60-15
+Burst/Surge	3,3·12	6,0·2,0	8,0·5,0	DNR-B 03-03-12-60-20
Level 3				
1,8kV / 42Ω				
Available max. output power $\Sigma P_A = 48W$ static and 58W <sup>1)</sup> dyn.				
Additionally the Auxiliary voltage Uout3: 5V/100mA is available at any time				

<b>14,4 - 34</b>	5,1·12	6,0·2,0	8,0·5,0	DNR-B 24-05-12-60-20
VG96916 T5	3,3·12	6,0·2,5	8,0·5,0	DNR-B 24-03-12-60-25
50V / 50ms				
70V / 2ms				
Available max. output power $\Sigma P_A = 54W$ static and 60W <sup>1)</sup> dyn.				
Additionally the Auxiliary voltage Uout3: 5V/100mA is available at any time				

<b>14,4 - 52</b>	5,1·12	7,0·2,0	8,0·5,0	DNR-B 30-05-12-70-20
+Burst/Surge	3,3·12	7,0·2,5	8,0·5,0	DNR-B 30-03-12-70-25
Level 3				
1,8kV / 42Ω				
Available max. output power $\Sigma P_A = 54W$ static and 60W <sup>1)</sup> dyn.				
Additionally the Auxiliary voltage Uout3: 5V/100mA is available at any time				

<b>45 - 154</b>	5,1·12	7,0·2,0	8,0·5,0	DNR-B 80-05-12-70-20
+Burst/Surge	3,3·12	7,0·2,5	8,0·5,0	DNR-B 80-03-12-70-25
Level 3				
1,8kV / 42Ω				
Available max. output power $\Sigma P_A = 54W$ static and 60W <sup>1)</sup> dyn.				
Additionally the Auxiliary voltage Uout3: 5V/100mA is available at any time				

Modification costs for possible changes above values On request

#### Notice:

Smaller inputs voltage ranges result higher efficiency  
and higher functional reliability (less stress factors)

1) While using the heat-operation ( $< 15^\circ C$  ambient temperature) the dynamical power value  
can be used as a static power out of the 12V-output.

DC/DC-converter of the series **DNR-B** are special designs for the use in display-systems for mobile applications.

The modern circuit-concept allows input voltage ranges of  $> 1:10$ . This brings the logistic advantage to be able to run on all worldwide available railway on-board networks without switch over.

Special effort was put in the realisation of the requirements of the EN 50155/121-standard for electrical systems on rolling stock.

A special inhibit-logic-circuit (key-switch SB as request-command) which is explained in a application report (on request) simplifies enormous the power supply's system-integration. So the converter can be used without any external circuits and because of the low stationary current at not activated outputs the converter can stay stand-by on the network.


The power supply is equipped with a active hold-up time. Input sided interruptions can be bridged with times of  $> 10$  ms from the minimum input voltage which makes the series DNR.B usable in security relevant applications. The hold-up time is almost extendable to any value with external capacitors and constant over the whole input voltage range.

Railway known disturbances (transients) are reduced with the sufficient dimensioned filter circuit and the standards EN 61000-4-4 (Burst) and EN 61000-4-5 (Surge) are kept.


The 5,1V (Uout1) can be switched off with the inhibit-command in the case that the converter is activated and the sum-power can be used for a heating operation at the 12V-output. The converter is activated with the SB-signal and can be confirmed as well as switched off with the BST-signal.

### Detailed functional description „DNR.B“ on request

### Measurement of radio interference

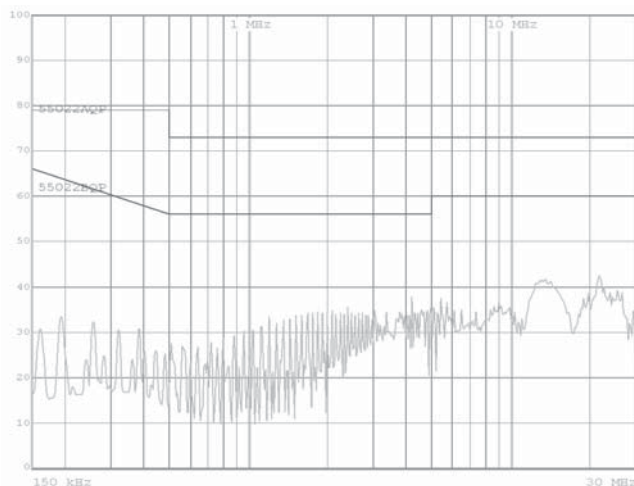

### Mechanics

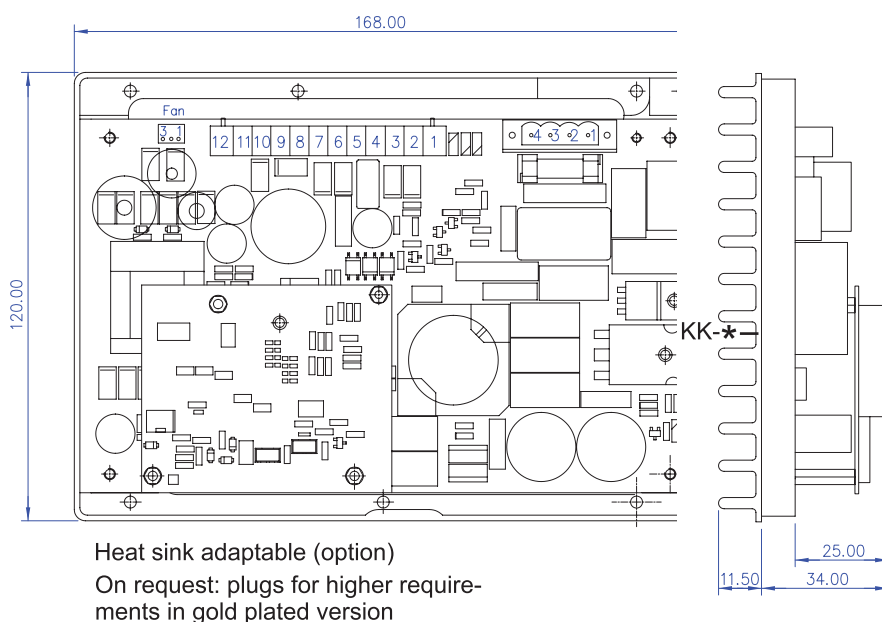

### Efficiency

